

Apollo 600

Technical Datasheet

DOXIS
LIGHTING FACTORY




General specs

Type	Suspended
Material	Aluminium
Lamp	COB LED / GU10
Dimmable	LED: Yes GU10: Lightsource dependant

IP20 960°C

Suspension cables + power supply max. 2100mm

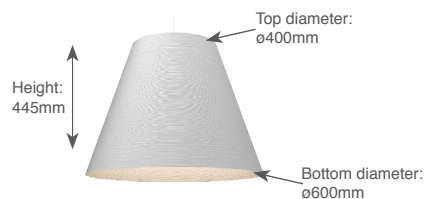

Features:
Available with 3 Titan LEDs or 3 x GU10 socket

Apollo 600 Ttextured		Lightsource	Light output	LED efficacy	Power	Power supply	Beam angle	CRI	CCT	SDCM	Life L70B50
	Art. nr.		lm	lm/W	W		°	Ra	K		Hrs
3x GU10	109.05.01	3x GU10 (not incl.)	-	-	3x max. 35W	230V AC	-	-	-	-	-
3x Titan	109.2600.24.927.xx	3x Titan (incl.)	2730	98	3x 9.3W	Driver non dim. (incl.)	40	>90	2700	3	50000
	109.2600.25.927.xx	3x Titan (incl.)	2730	98	3x 9.3W	Driver 1-10V dim. (incl.)	40	>90	2700	3	50000
	109.2600.26.927.xx	3x Titan (incl.)	2730	98	3x 9.3W	Driver DALI dim. (incl.)	40	>90	2700	3	50000
	109.2600.27.927.xx	3x Titan (incl.)	2730	98	3x 9.3W	3x Driver Mains dim. (incl.)	40	>90	2700	3	50000
	109.2600.29.927.xx	3x Titan (incl.)	2730	98	3x 9.3W	Driver Push dim. (incl.)	40	>90	2700	3	50000

Available colors: 0000.00.0000.00.xx
Other RAL colors on request!!



Detail of inner surface:

