

# Dome 720 Textured

Technical Datasheet

**DOXIS**  
LIGHTING FACTORY



## General specs

Type	Suspended
Material	Aluminium
Lamp	COB LED / GU10
Dimmable	LED: Yes GU10: Lightsource dependant

IP20 960°C

Suspension cables + power supply max. 2100mm




### Features:

Available with 3 Titan LEDs or 3 x GU10 socket

Dome 720 Textured		Lightsource	Light output	LED efficacy	Power	Power supply	Beam angle	CRI	CCT	SDCM	Life L70B50
Art. nr.			lm	lm/W	W		°	Ra	K		Hrs
<b>3x GU10</b>	108.05.01	3x GU10 (not incl.)	-	-	3x max. 35W	230V AC	-	-	-	-	-
<b>3x Titan</b>	108.2600.24.927.xx	3x Titan (incl.)	2730	98	3x 9.3W	Driver non dim. (incl.)	40	>90	2700	3	50000
	108.2600.25.927.xx	3x Titan (incl.)	2730	98	3x 9.3W	Driver 1-10V dim. (incl.)	40	>90	2700	3	50000
	108.2600.26.927.xx	3x Titan (incl.)	2730	98	3x 9.3W	Driver DALI dim. (incl.)	40	>90	2700	3	50000
	108.2600.27.927.xx	3x Titan (incl.)	2730	98	3x 9.3W	3x Driver Mains dim. (incl.)	40	>90	2700	3	50000
	108.2600.29.927.xx	3x Titan (incl.)	2730	98	3x 9.3W	Driver Push dim. (incl.)	40	>90	2700	3	50000

Available colors: 0000.00.0000.00.xx  
Other RAL colors on request!!

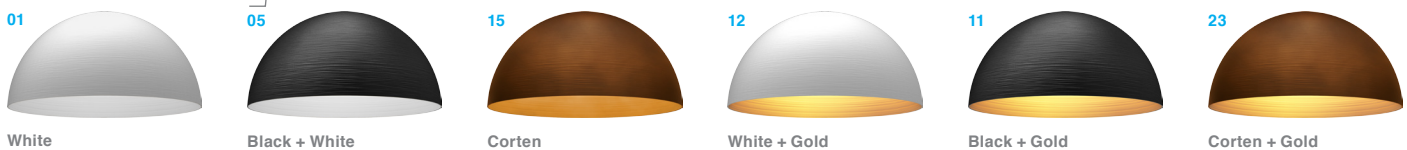

Optional RGB Modules		Lightsource	Channel output	Power	Control
Art. nr.			lm		
<b>DALI</b>	105.00.26	RGB LEDstrip with Vossloh Schwabe control gear	R:530lm - G:1160lm - B:200lm	55W	DALI
<b>DMX</b>	105.00.34	RGB LEDstrip with Vossloh Schwabe control gear	R:530lm - G:1160lm - B:200lm	55W	DMX
<b>IR Stand-alone*</b>	105.00.30	RGB LEDstrip with Vossloh Schwabe control gear	R:530lm - G:1160lm - B:200lm	55W	Wireless (IR remote incl.)

### \*IR (Wireless) RGB module:

This version allows you to select individual colors and several programs.  
An IR Stand-alone module can be controlled using the included Remote control.  
IR version cannot be synchronised!

Detail of inner surface:

